



MOD. 25 pressostato a taratura fissa *fixed setting pressure switch*

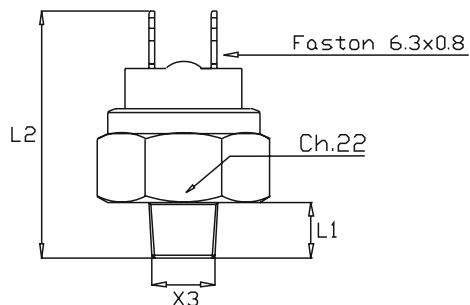

X3	L1	L2
1/8"	8	36
1/4"	10	38

• Corpo	Acciaio zincato
• Contatti elettrici	Argentati
• Condizione elettrica	N.A.
• Max tensione commutabile	24 V
• Max corrente commutabile	2 A
• Max temperatura fluido	100 °C
• Vita meccanica	10 ⁵ operazioni
• Tipo di azionamento	1B
• Situazione di inquinazione	normale
• Grado di protezione	IP 00
• Membrana	NBR
• Peso	~ 35 gr

• Case	Zinc plated steel
• Electric contacts	Silver plated
• Electric conditions	N.O.
• Max switched voltage	24 V
• Max switched current	2 A
• Max fluid temperature	100°C
• Mechanical working life	10 ⁵ operations
• Action type	1B
• Pollution situation	normal
• Protection degree	IP 00
• Diaphragm	NBR
• Weight	~ 35 gr

Codice - Part Number	filettatura - thread	Campo di intervento Switching range bar
contatto elettrico electrical contact		
norm. aperto → 		
norm. open		
25 1 0 1 1 0	1/8" gas cilindrico - cylindrical	1 - 4
25 1 0 2 1 0	1/4" gas cilindrico - cylindrical	
25 1 0 3 1 0	1/8" gas conico - conical	
25 1 0 4 1 0	1/4" gas conico - conical	
25 1 0 1 1 1	1/8" gas cilindrico - cylindrical	3 - 6
25 1 0 2 1 1	1/4" gas cilindrico - cylindrical	
25 1 0 3 1 1	1/8" gas conico - conical	
25 1 0 4 1 1	1/4" gas conico - conical	
80 bar	Massima pressione statica - Max static pressure	