



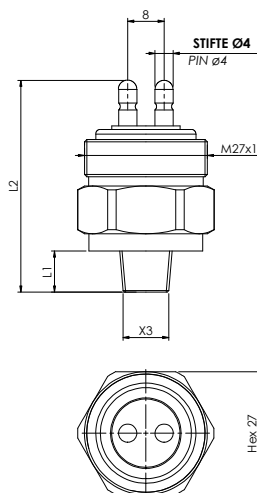

26

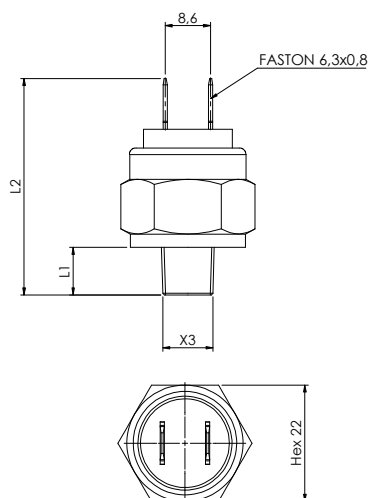

266

Code Part number		Schaltbereich bar Operating range bar
Elektrischer Kontakt norm. offen Electrical contact norm. open		
26 1 0 ● ■ 0	266 0 ● ■ 0	1 - 4
26 1 0 ● ■ 1	266 0 ● ■ 1	3 - 6

Gewinde Threads	Mod. 26		Mod. 266	
	L1mm	L2mm	L1mm	L2mm
1 - 1/8" Gas konisch 1 - 1/8" Gas conical	8	39	10	48
2 - 1/4" Gas konisch 2 - 1/4" Gas conical	10	41	12	50
3 - M10x1 konisch 3 - M10x1 conical	9	40	9	47

Membran (Siehe S. 19) Diaphragms (see page 19)
1 NBR (Standard)
2 FKM
3 EPDM
6 HNBR

Gehäuse Case	Acciaio zincato Zinc plated steel
Elektrische Kontakte Electric contacts	Versilbert Silver plated
Elektrischer Zustand Electric conditions	N.O.
Max. Schaltspannung Max switched voltage	24 V
Max. Schaltstrom Max switched current	2 A

Max. Fluidtemperatur Max fluid temperature	100° C
Mechanische Lebensdauer Mechanical working life	10 ⁵ Schaltspiele (0 - 200 bar) 10 ⁵ operations (0 - 200 bar)
Max. Sicherheitsdruck Max overpressure limit	400 bar
Art des Antriebs Action type	1B
Gewicht Weight	mod 26 ~ 35 g mod 266 ~ 70 g