


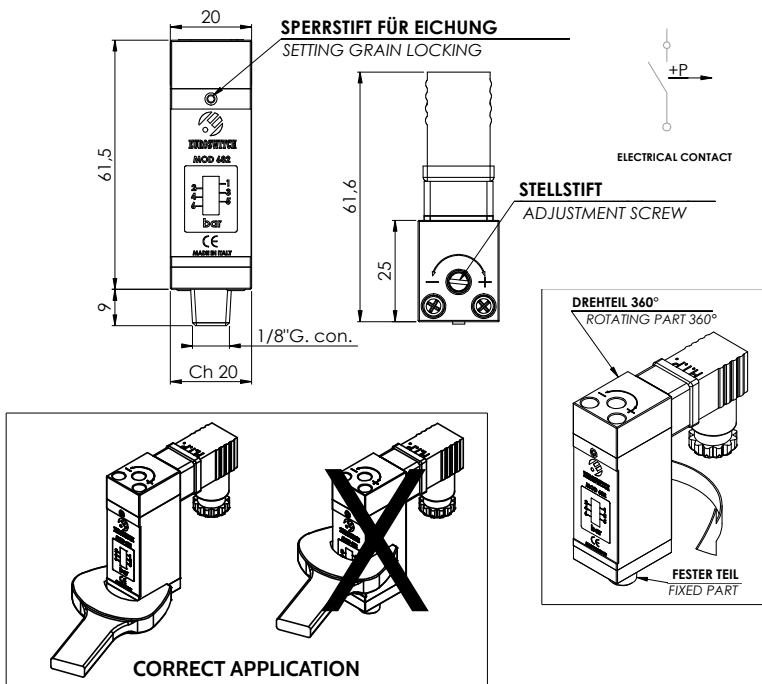

Code Part number	Gewinde Thread	Regelbereich Setting range bar
682 1 3 1 1 1	1/8" gas konisch 1/8" ga conical	1 - 6

Arbeitsfluid Medium	Luft Air
Gehäuse Case	Eloxiertes Aluminium Anodized aluminium
Gewinde Threaded fitting	Messing Brass
Etikett Label	Optisches Polycarbonat Optical polycarbonate
Elektrischer Anschluss Type of contact	Verbinder DIN43650-C int-9,4 Connector DIN43650-C int-9,4
Elektrischer Kontakt Label	Reed SPST NO Reed SPST NO
Max. Schaltspannung Max switch voltage	48V
Max. Schaltstrom Max switch current	0,5A

Max. Schaltspannung Max switch capacity	10W
Max. Fluidtemperatur Max fluid temperature	60° C
Max. Sicherheitsdruck Max Overpressure limit	20 bar
Art des Antriebs Action type	1B
Mechanische und elektrische Lebensdauer Mechanical and electrical working life	10 ⁶
Schutzklasse Protection degree	IP40
Anzugsmoment Tightening torque	15 - 20 Nm
Gewicht Weight	~ 105 g