
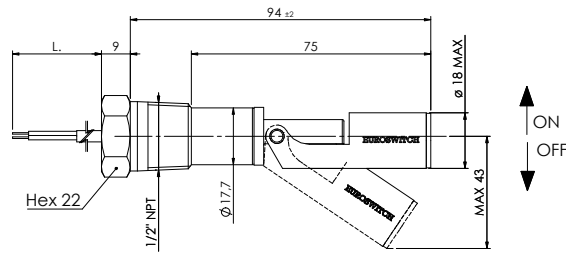


P580AH

P580F8

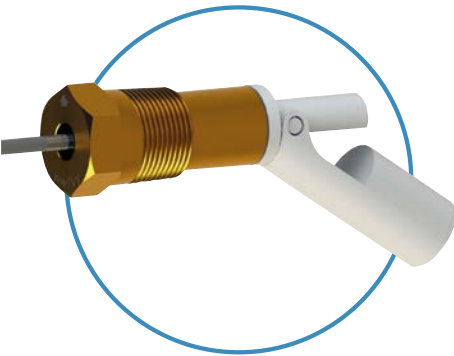

			Code Part number			
Befestigung - Messing Fixing - Brass	Elektrische Verbindung Electrical connection		SCHWARZ BLACK	SCHWARZ BLACK	ORANGE ODER SCHWARZ ORANGE OR BLACK	NC WEISS ODER BLAU NC WHITE OR BLUE NO BRAUN/BROWN
X1 = 1/2" NPT	L = 500 mm Leitungen/wires	Polipropilen Polypropylene	P580AH - 100		P580AH - 500	
		Nylon Nylon	P580F8 - 100		P580F8 - 500	
	L = 1 mt Kabel/cable	Polipropilen Polypropylene	P580AH - 110		P580AH - 510	
		Nylon Nylon	P580F8 - 110		P580F8 - 510	
	L = 2 mt Kabel/cable	Polipropilen Polypropylene	P580AH - 120		P580AH - 520	
		Nylon Nylon	P580F8 - 120		P580F8 - 520	
Um von N.C. auf N.O. überzugehen, muss lediglich der Schwimmer umgedreht werden The contact can be converted from N.C. to N.O. by rotating the float upside down					SPDT Kontakt SPDT Contact	

Bei nicht isolierten Anschlüssen müssen die nötigen Vorkehrungen getroffen werden, um die mindesten Sicherheitsabstände zwischen den verschiedenen Klemmen zu gewährleisten. Für kundenspezifische Versionen (Materialien, Art der Verkabelung, Temperatur > 80°C, Spannung > 50V usw.) setzen Sie sich bitte mit unserer Vertriebsabteilung in Verbindung.

When using non-insulated connections, the necessary precautions must be taken to ensure the minimum safety distance between the terminals.
For customized version (material, type of cable, temperature > 80°C, voltage > 50V, etc.) please contact Euroswitch.

Anwendung Use	P580AH	Wasser Water
	P580F8	Mineralöle - Gasöl - Benzin Mineral Oils - Diesel fuel - Petrol
Schaft Stem	P580AH	Polipropilen Polypropylene
	P580F8	Nylon
Schwimmer Float	P580AH	Polipropilen Polypropylene
	P580F8	Nylon
Kontaktart Type of contact	Reed N.A./N.C. (SPDT) Reed N.O./N.C. (SPDT)	
Max Schaltleistung Max switch. capacity	40 W - (3 W SPDT)	

Max Schaltstrom Max switch. current	1 A - (0,25 A SPDT)	
Max Schaltspannung Max switch. voltage	50 V	
Belastungssituation Pollution situation	Normal Normal	
Spezif. Gewicht d. Flüssigkeit Specific fluid weight	Polipropilen > 0,80 Nylon > 0,85 Polypropylene > 0,80 Nylon > 0,85	
Betriebs temperatur Working temperature	P580AH	-10°C / +80°C
	P580F8	-10°C / +100°C
Gewicht Weight	~ gr 90	