



P200

SENSORE DI LIVELLO Elettromagnetico ELECTROMAGNETIC LEVEL SENSOR

P200AC

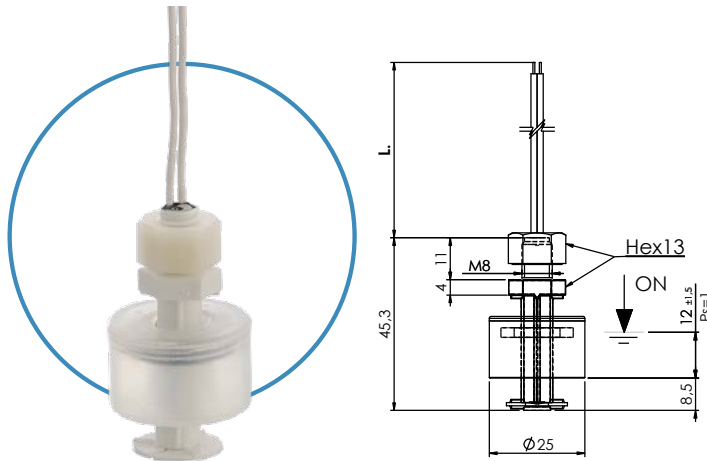

P200F7

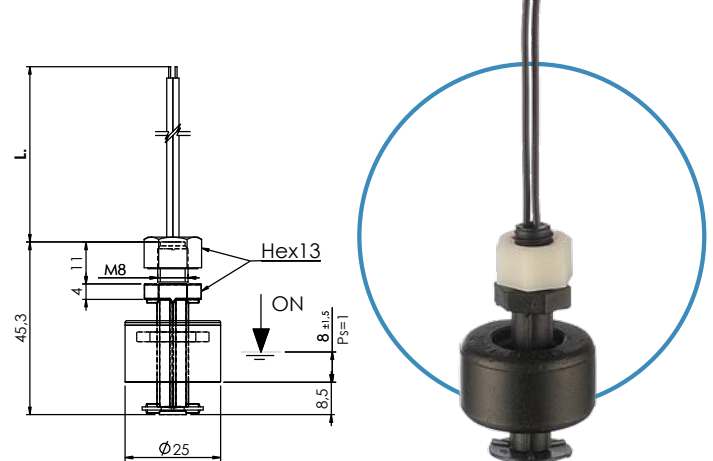

		Codice Part number	
Connessione elettrica Electrical connection	Materiale Stelo - Galleggiante Material Stem - Float		ORANGE OR BLACK — NC WHITE OR BLUE — NO BROWN
L = 500 mm fili/wires	Polipropilene Polypropylene	P200AC - 100	P200AC - 500
	Nylon Nylon	P200F7 - 100	P200F7 - 500
L = 1 mt cavetto/cable	Polipropilene Polypropylene	P200AC - 110	P200AC - 510
	Nylon Nylon	P200F7 - 110	P200F7 - 510
L = 2 mt cavetto/cable	Polipropilene Polypropylene	P200AC - 120	P200AC - 520
	Nylon Nylon	P200F7 - 120	P200F7 - 520
Per passare da N.C. a N.A. è sufficiente capovolgere il galleggiante The contact can be converted from N.C. to N.O. by rotating the float upside down		Contatto SPDT SPDT Contact	

Nel caso di connessioni non isolate devono essere prese le adeguate precauzioni per garantire la distanza minima di sicurezza tra i diversi morsetti.
Per versioni personalizzate (materiali, tipo di cablaggio, temperatura > 100°C, tensione > 50V, ecc.) contattare nostro Ufficio Commerciale

When using non-insulated connections, the necessary precautions must be taken to ensure the minimum safety distance between the terminals
For customized version (material, type of cable, temperature > 100°C, voltage > 50V, etc.) please contact our Customer Service

Impiego Use	P200AC	Acqua - Acidi (Fluidi alimentari a richiesta) Water - Acids (Alimentary liquids on request)
	P200F7	Oli minerali - Gasolio - Benzina Mineral Oils - Diesel fuel - Petrol
Fissaggio Fixing	M8 x 1.25	
Stelo Stem	P200AC	Polipropilene Polypropylene
	P200F7	Nylon
Galleggiante Float	P200AC	Polipropilene Polypropylene
	P200F7	NBR
Dado Nut	Nylon	
Tipo contatto Type of contact	Reed N.A./N.C. (SPDT) Reed N.O./N.C. (SPDT)	

Max potenza commut. Max switch. capacity		40 W - (3 W SPDT)
Max corrente commut. Max switch. current		1 A - (0,25 A SPDT)
Max tensione commut. Max switch. voltage	P200AC	48 V ac / dc (250V a richiesta) 48 V ac / dc (250V on request)
	P200F7	48 V ac / dc
Peso specif. liquido Specific fluid weight	P200AC	> 0.75
	P200F7	> 0,7
Temp. in funzionamento Working temperature	P200AC	-10°C / +80°C
	P200F7	-10°C / +100°C
Peso Weight		~ gr 12