





P004AC

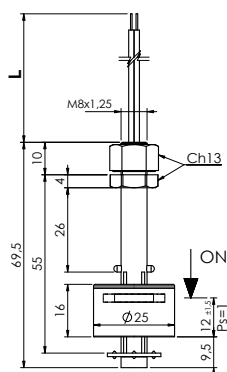

P004F7

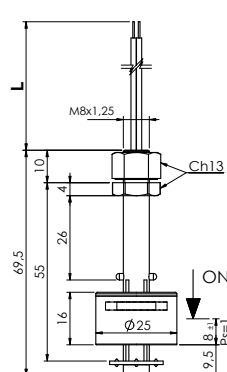

		Codice Part number	
Connessione elettrica Electrical connection	Materiale Stelo - Galleggiante Material Stem - Float		ORANGE OR BLACK — NC WHITE OR BLUE — NO BROWN
L = 500 mm fili/wires	Polipropilene Polypropylene	P004AC - 100	P004AC - 500
	Nylon Nylon	P004F7 - 100	P004F7 - 500
L = 1 mt cavetto/cable	Polipropilene Polypropylene	P004AC - 110	P004AC - 510
	Nylon Nylon	P004F7 - 110	P004F7 - 510
L = 2 mt cavetto/cable	Polipropilene Polypropylene	P004AC - 120	P004AC - 520
	Nylon Nylon	P004F7 - 120	P004F7 - 520
Per passare da N.C. a N.A. è sufficiente capovolgere il galleggiante The contact can be converted from N.C. to N.O. by rotating the float upside down			Contatto SPDT SPDT Contact

Nel caso di connessioni non isolate devono essere prese le adeguate precauzioni per garantire la distanza minima di sicurezza tra i diversi morsetti.
Per versioni personalizzate (materiali, tipo di cablaggio, temperatura > 100°C, tensione > 50V, ecc.) contattare nostro Ufficio Commerciale

When using non-insulated connections, the necessary precautions must be taken to ensure the minimum safety distance between the terminals
For customized version (material, type of cable, temperature > 100°C, voltage > 50V, etc.) please contact our Customer Service

Impiego Use	P004AC	Acqua - Acidi (Fluidi alimentari a richiesta) Water - Acids (Alimentary liquids on request)
	P004F7	Oli minerali - Gasolio - Benzina Mineral Oils - Diesel fuel - Petrol
Fissaggio Fixing		M8 x 1.25
Stelo Stem	P004AC	Polipropilene Polypropylene
	P004F7	Nylon
Galleggiante Float	P004AC	Polipropilene Polypropylene
	P004F7	NBR
Dado Nut		Nylon
Tipo contatto Type of contact		Reed N.A./N.C. (SPDT) Reed N.O./N.C. (SPDT)

Max potenza commut. Max switch. capacity		40 W - (3 W SPDT)
Max corrente commut. Max switch. current		1 A - (0.25 A SPDT)
Max tensione commut. Max switch. voltage	P004AC	48 V ac / dc (250V a richiesta) 48 V ac / dc (250V on request)
	P004F7	48 V ac / dc
Peso specif. liquido Specific fluid weight	P004AC	> 0,75
	P004F7	> 0,7
Temp. in funzionamento Working temperature	P004AC	-10°C / +80°C
	P004F7	-10°C / +100°C
Peso Weight		~ gr 18