



P005

SENSORE DI LIVELLO Elettromagnetico ELECTROMAGNETIC LEVEL SENSOR

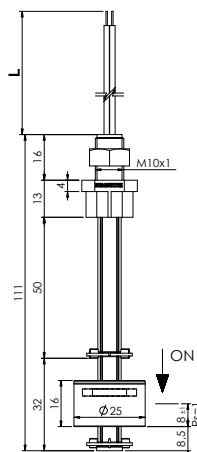

P005AC

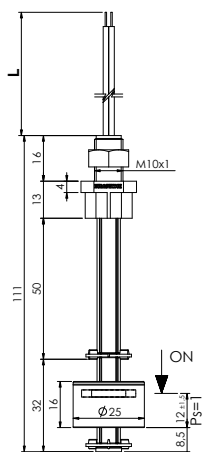

P005F7



		Codice Part number	
Connessione elettrica Electrical connection	Materiale Stelo - Galleggiante Material Stem - Float		ORANGE OR BLACK — NC WHITE OR BLUE — NO BROWN
L = 500 mm fili/wires	Polipropilene Polypropylene	P005AC - 100	P005AC - 500
	Nylon Nylon	P005F7 - 100	P005F7 - 500
L = 1 mt cavetto/cable	Polipropilene Polypropylene	P005AC - 110	P005AC - 510
	Nylon Nylon	P005F7 - 110	P005F7 - 510
L = 2 mt cavetto/cable	Polipropilene Polypropylene	P005AC - 120	P005AC - 520
	Nylon Nylon	P005F7 - 120	P005F7 - 520
Per passare da N.C. a N.A. è sufficiente capovolgere il galleggiante The contact can be converted from N.C. to N.O. by rotating the float upside down			Contatto SPDT SPDT Contact

Nel caso di connessioni non isolate devono essere prese le adeguate precauzioni per garantire la distanza minima di sicurezza tra i diversi morsetti.
Per versioni personalizzate (materiali, tipo di cablaggio, temperatura > 100°C, tensione > 50V, ecc.) contattare nostro Ufficio Commerciale

When using non-insulated connections, the necessary precautions must be taken to ensure the minimum safety distance between the terminals
For customized version (material, type of cable, temperature > 100°C, voltage > 50V, etc.) please contact our Customer Service

Impiego Use	P005AC	Acqua - Acidi (Fluidi alimentari a richiesta) Water - Acids (Alimentary liquids on request)
	P005F7	Oli minerali - Gasolio - Benzina Mineral Oils - Diesel fuel - Petrol
Fissaggio Fixing	M 10x1	
Stelo Stem	P005AC	Polipropilene Polypropylene
	P005F7	Nylon
Galleggiante Float	P005AC	Polipropilene Polypropylene
	P005F7	NBR
Dado Nut	Nylon	
Tipo contatto Type of contact	Reed N.A./N.C. (SPDT) Reed N.O./ N.C. (SPDT)	
Max potenza commut. Max switch. capacity	40 W - (3 W SPDT)	

Max corrente commut. Max switch. current	1 A - (0,25 A SPDT)	
Max tensione commut. Max switch. voltage	P005AC	50 V (250V a richiesta) 50 V (250V on request)
	P005F7	50 V
Peso specif. liquido Specific fluid weight	P005AC	> 0,75
	P005F7	> 0,7
Temp. in funzionamento Working temperature	P005AC	-10°C / +80°C
	P005F7	-10°C / +100°C
Peso Weight	P005AC	~ gr 20
	P005F7	~ gr 24