



P535AH

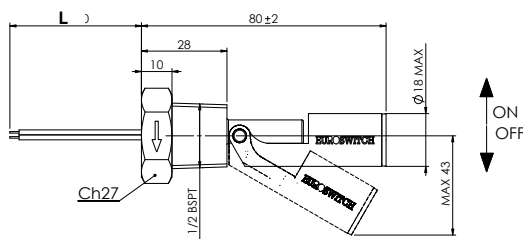

P535F8

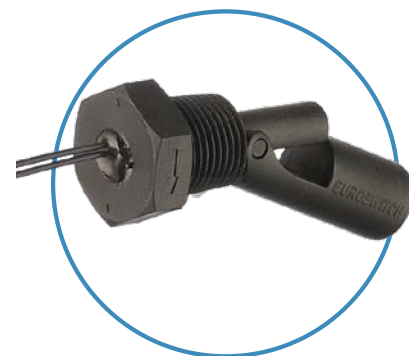

		Codice Part number	
Connessione elettrica Electrical connection	Materiale Stelo - Galleggiante Material Stem - Float		ORANGE OR BLACK — NC WHITE OR BLUE — NO BROWN
L = 500 mm fili/wires	Polipropilene Polypropylene	P535AH - 100	P535AH - 500
	Nylon Nylon	P535F8 - 100	P535F8 - 500
L = 1 mt cavetto/cable	Polipropilene Polypropylene	P535AH - 110	P535AH - 510
	Nylon Nylon	P535F8 - 110	P535F8 - 510
L = 2 mt cavetto/cable	Polipropilene Polypropylene	P535AH - 120	P535AH - 520
	Nylon Nylon	P535F8 - 120	P535F8 - 520
Per passare da N.C. a N.A. è sufficiente capovolgere il galleggiante The contact can be converted from N.C. to N.O. by rotating the float upside down			Contatto SPDT SPDT Contact

Nel caso di connessioni non isolate devono essere prese le adeguate precauzioni per garantire la distanza minima di sicurezza tra i diversi morsetti.
Per versioni personalizzate (materiali, tipo di cablaggio, temperatura > 100°C, tensione > 50V, ecc.) contattare nostro Ufficio Commerciale

When using non-insulated connections, the necessary precautions must be taken to ensure the minimum safety distance between the terminals
For customized version (material, type of cable, temperature > 100°C, voltage > 50V, etc.) please contact our Customer Service

Impiego Use	P535AH	Acqua - Acidi (Fluidi alimentari a richiesta) Water - Acids (Alimentary liquids on request)
	P535F8	Oli minerali - Gasolio Mineral oils - Diesel fuel
Fissaggio Fixing		G 1/2" conico G 1/2" conical
Stelo Stem	P535AH	Polipropilene Polypropylene
	P535F8	Nylon
Galleggiante Float	P535AH	Polipropilene Polypropylene
	P535F8	Nylon
Tipo contatto Type of contact		Reed N.A./N.C. (SPDT) Reed N.O./N.C. (SPDT)
Max potenza commut. Max switch. capacity		40 W - (3 W SPDT)

Max corrente commut. Max switch. current		1 A - (0.25 A SPDT)
Max tensione commut. Max switch. voltage	P535AH	48 V ac / dc (250V a richiesta) 48 V ac / dc (250V on request)
	P535F8	48 V ac / dc
Peso specif. liquido Specific fluid weight	P535AH	> 0,8
	P535F8	> 0,85
Temp. in funzionamento Working temperature	P535AH	-10°C / +80°C
	P535F8	-10°C / +100°C
Peso Weight		~ gr 24