


P500AH



P500F8

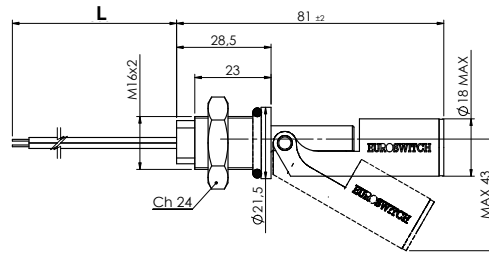

		Codice Part number	
Connessione elettrica Electrical connection	Materiale Stelo - Galleggiante Material Stem - Float		
L = 500 mm fili/wires	Polipropilene Polypropylene	P500AH - 100	P500AH - 500
	Nylon Nylon	P500F8 - 100	P500F8 - 500
L = 1 mt cavetto/cable	Polipropilene Polypropylene	P500AH - 110	P500AH - 510
	Nylon Nylon	P500F8 - 110	P500F8 - 510
L = 2 mt cavetto/cable	Polipropilene Polypropylene	P500AH - 120	P500AH - 520
	Nylon Nylon	P500F8 - 120	P500F8 - 520
Per passare da N.C. a N.A. è sufficiente capovolgere il galleggiante The contact can be converted from N.C. to N.O. by rotating the float upside down			Contatto SPDT SPDT Contact

Nel caso di connessioni non isolate devono essere prese le adeguate precauzioni per garantire la distanza minima di sicurezza tra i diversi morsetti.
Per versioni personalizzate (materiali, tipo di cablaggio, temperatura > 80°C, tensione > 50V, ecc.) contattare Euroswitch.

When using non-insulated connections, the necessary precautions must be taken to ensure the minimum safety distance between the terminals.
For customized version (material, type of cable, temperature > 80°C, voltage > 50V, etc.) please contact Euroswitch.

Impiego Use	P500AH	Acqua - Acidi (Fluidi alimentari a richiesta) Water - Acids (Alimentary liquids on request)
	P500F8	Oli minerali - Gasolio Mineral oils - Diesel fuel
Fissaggio Fixing		M 16X2
Stelo Stem	P500AH	Polipropilene Polypropylene
	P500F8	Nylon
Galleggiante Float	P500AH	Polipropilene Polypropylene
	P500F8	Nylon
Dado Nut		Nylon
O-Ring	P500AH	Silicone Silicone
	P500F8	Viton
Tipo contatto Type of contact		Reed N.A./N.C. (SPDT) Reed N.O./N.C. (SPDT)

Max potenza commut. Max switch. capacity		40 W - (3 W SPDT)
Max corrente commut. Max switch. current		1 A - (0,25 A SPDT)
Max tensione commut. Max switch. voltage	P500AH	48 V ac / dc (250V a richiesta) 48 V ac / dc (250V on request)
	P500F8	48 V ac / dc
Peso specif. liquido Specific fluid weight	P500AH	> 0.75
	P500F8	> 0.85
Temp. in funzionamento Working temperature	P500AH	-10°C / +80°C
	P500F8	-10°C / +100°C
Peso Weight	P500AH	~ gr 28
	P500F8	~ gr 24