



P005 ELEKTROMAGNETISCHER FÜLLSTANDSENSOR ELECTROMAGNETIC LEVEL SENSOR




P005AC

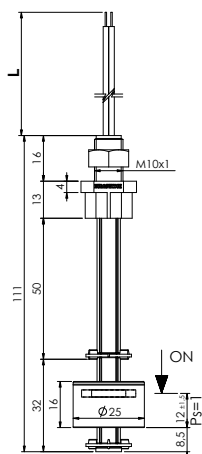

P005F7

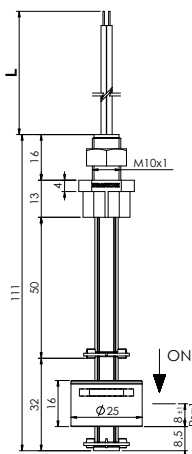

		Code Part number		
Elektrische Verbindung Electrical connection	Material Schaft - Schwimmer Material Stem - Float		ORANGE ODER SCHWARZ ORANGE OR BLACK	NC WEISS ODER BLAU NC WHITE OR BLUE NO BRAUN/BROWN
L = 500 mm Leitungen/wires	Polipropilen Polypropylene	P005AC - 100	P005AC - 500	
	Nylon Nylon	P005F7 - 100	P005F7 - 500	
L = 1 mt Kabel/cable	Polipropilen Polypropylene	P005AC - 110	P005AC - 510	
	Nylon Nylon	P005F7 - 110	P005F7 - 510	
L = 2 mt Kabel/cable	Polipropilen Polypropylene	P005AC - 120	P005AC - 520	
	Nylon Nylon	P005F7 - 120	P005F7 - 520	
Um von N.C. auf N.O. überzugehen, muss lediglich der Schwimmer umgedreht werden The contact can be converted from N.C. to N.O. by rotating the float upside down			SPDT Kontakt SPDT Contact	

Bei nicht isolierten Anschlüssen müssen die nötigen Vorkehrungen getroffen werden, um die mindesten Sicherheitsabstände zwischen den verschiedenen Klemmen zu gewährleisten. Für kundenspezifische Versionen (Materialien, Art der Verkabelung, Temperatur > 100°C, Spannung > 50V usw.) setzen Sie sich bitte mit unserer Vertriebsabteilung in Verbindung.

When using non-insulated connections, the necessary precautions must be taken to ensure the minimum safety distance between the terminals
For customized version (material, type of cable, temperature > 100°C, voltage > 50V, etc.) please contact our Customer Service

Anwendung Use	P005AC	Wasser - Säuren (Lebensmittelflüssigkeiten auf Anfrage) Water - Acids (Alimentary liquids on request)
	P005F7	Mineralöle - Gasöl - Benzin Mineral Oils - Diesel fuel - Petrol
Befestigung Fixing	M 10x1	
Schaft Stem	P005AC	Polipropilen Polypropylene
	P005F7	Nylon
Schwimmer Float	P005AC	Polipropilen Polypropylene
	P005F7	NBR
Mutter Nut	Nylon	
Kontaktart Type of contact	Reed N.A./N.C. (SPDT) Reed N.O./N.C. (SPDT)	
Max Schaltleistung Max switch. capacity	40 W - (3 W SPDT)	

Max Schaltstrom Max switch. current		1 A - (0,25 A SPDT)
Max Schaltspannung Max switch. voltage	P005AC	50 V (250V auf Anfrage) 50 V (250V on request)
	P005F7	50 V
Spezif. Gewicht d. Flüssigkeit Specific fluid weight	P005AC	> 0,75
	P005F7	> 0,7
Betriebs temperatur Working temperature	P005AC	-10°C / +80°C
	P005F7	-10°C / +100°C
Gewicht Weight	P005AC	~ gr 20
	P005F7	~ gr 24